

Product features

- Built-in isolated adjustable power LED driver
- Supports DALI-2
- Supports i-Data function (DALI part 251, 252, 253)
- Flicker-free LED driver
- Current adjustment via DIP switch
- Output current 350...1050 mA
- Max output power 40 W
- Constant lumen output (CLO)
- Class 2 output
- 5 years warranty

Class P Class 2   



Product specifications

169511 XZ-DF40B-540105-AA

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor
350 mA	120 Vac	10...54 Vac	87.5%	± 5%	> 0.9 @ full load
740 mA			89%		
900 mA			88.5%		
1050 mA			88%		
350 mA	277 Vac		86.5%		
740 mA			89%		
900 mA			89%		
1050 mA			89%		

Electrical specifications

Mains voltage supply

Rated input voltage range	120...277 Vac; performance range
Max. input voltage range	108...305 Vac; performance range
Rated frequency range	50/60 Hz
Performance / Operational safety	47...63 Hz
Max. input current	0.44 A @ 120 Vac

Protection against voltage peaks

Withstand voltage	I/P-FG: 1.8 kVac, < 5 mA 60 s; I/P-DA: 1.8 kVac, < 5 mA 60 s O/P-FG: 0.6 kVac, < 5 mA 60 s; O/P-DA: 0.6 kVac, < 5 mA 60 s DA-FG: 0.6 kVac, < 5 mA 60 s; I/P-O/P: 1.8 kVac, < 5 mA 60 s
Mains surge immunity	L-N 1 kV per IEC 61000-4-5

Total harmonic distortion (THD)

At rated input voltage range @ full load	≤ 10%
--	-------

Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	60 Vdc
Ripple output current	≤ 5 (ripple = peak/average total 100 Hz)

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 60 V
Overpower protection	The output power is less than or equal to 44 W
Short circuit protection	Short circuit protection: Hiccup mode. Protection device will trigger when short circuit and will auto recover after the fault mode is removed.

Dimming operation and interface

Standby power consumption	≤ 0.50 W
Dimming current range	1%...100% (10.5...1050 mA)

Connection terminals

Connection terminal type	45° push in terminal
Wire cross section	Input and output wire: 16-20 AWG
Wire stripping length	8...9 mm

Degree of protection

Protection rating	IP20
-------------------	------

Operating data

Output current range	DIP control adjusts the current: 350...1050 mA
Default current	1050 mA
Output voltage range	10...54 Vdc
Noise level	< 20 dBA, at full load @ 100 cm distance

Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.

Environmental specifications

Operating temperature	-20... +50 °C
Storage temperature	-25... +85 °C
Working humidity	10%...90%
Store humidity	5%...95%
Lifetime	at Tc 80 °C: 50,000 h @ 120 Vac
Maximum Tc temperature	80 °C

Safety & EMC compliance

UL	CCC	SAA
UL8750		
CLASS P		
CSA C22.2 NO.250.13		
UL1310-CLASS 2		

Dimensions


Housing dimensions

Length (L)	278.0 mm
Width (W)	30.0 mm
Height (H)	21.0 mm


For all dimensions: values in in/mm; tolerances: ± 0.5 mm

Packaging details

Packing units	56 pcs
Carton size	375 x 325 x 185 mm
Carton weight	12.18 kg
Product weight	0.205 kg






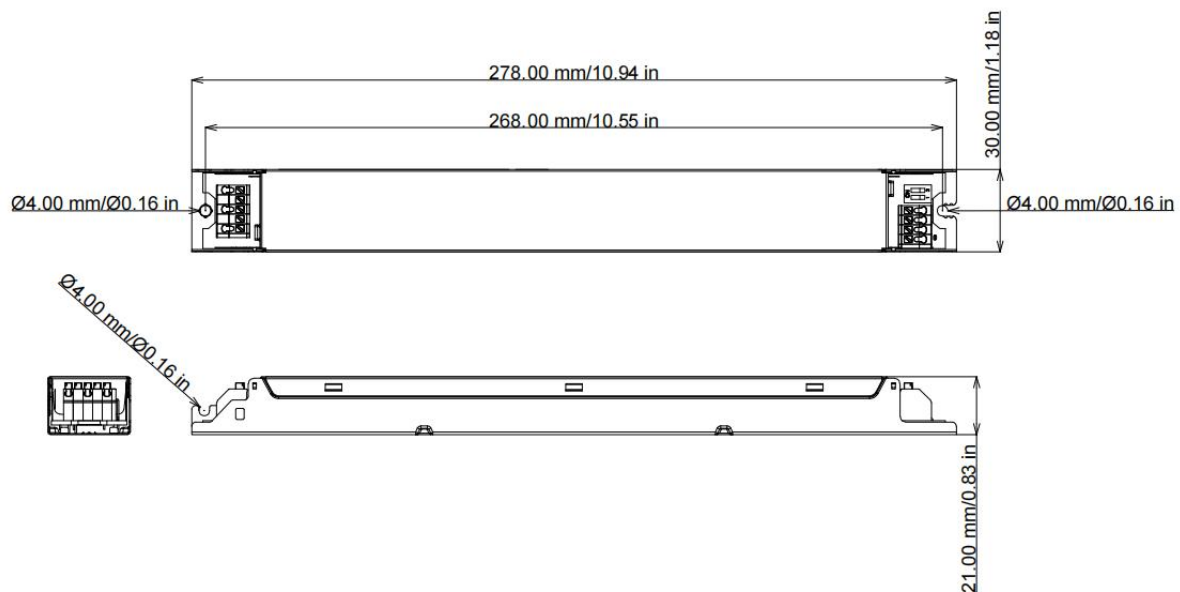




Wiring diagram

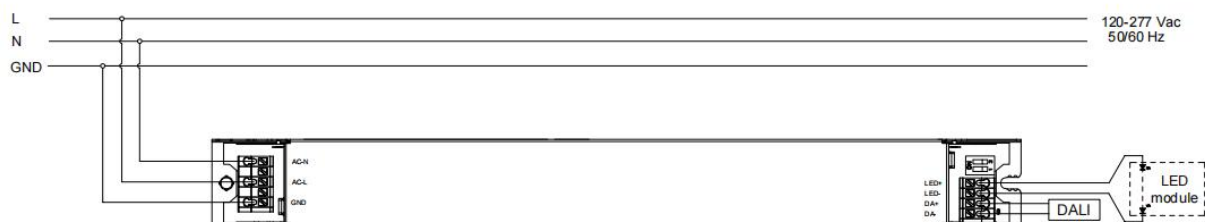

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5...10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.

Technical information

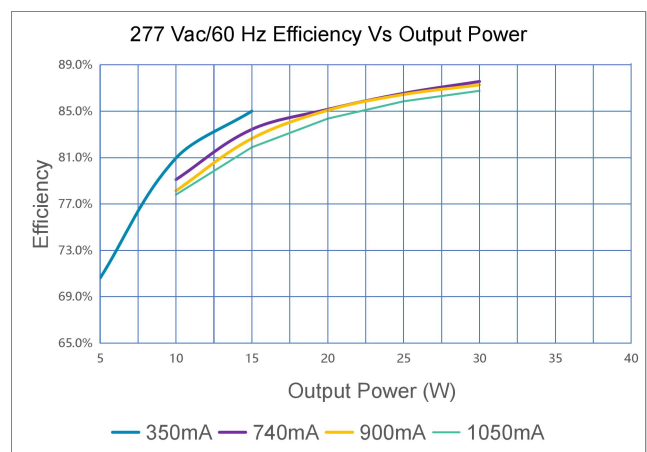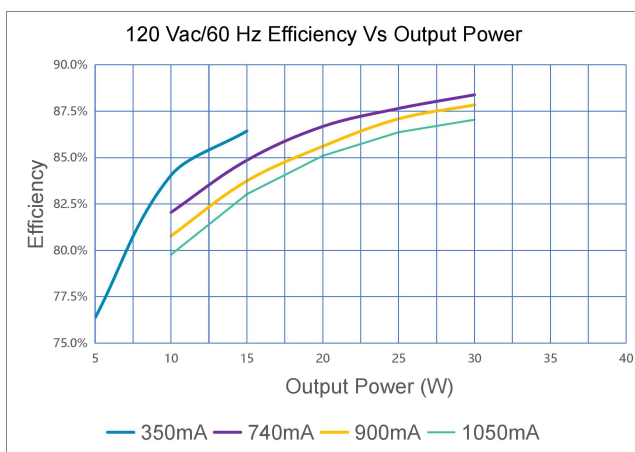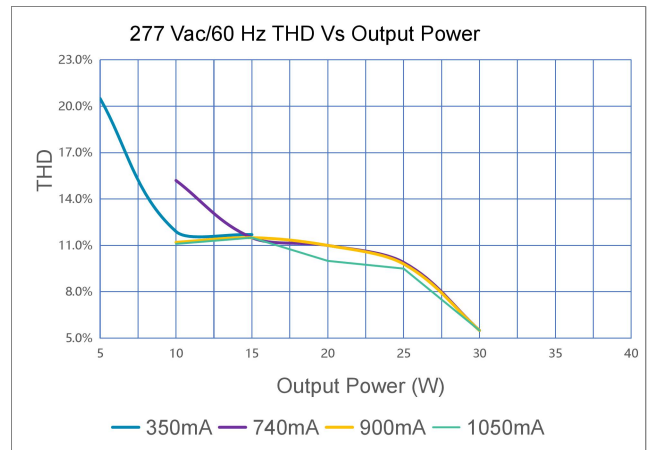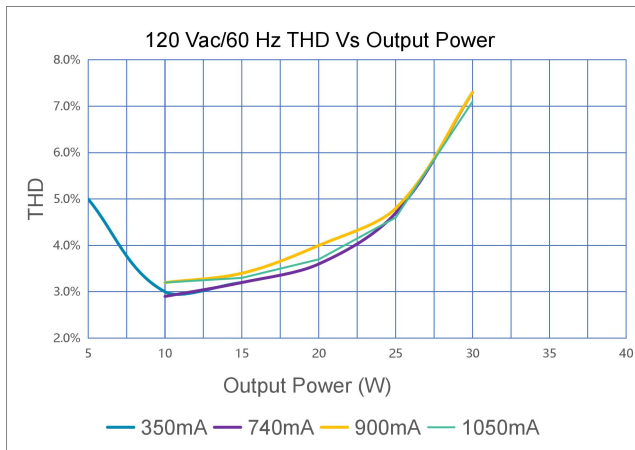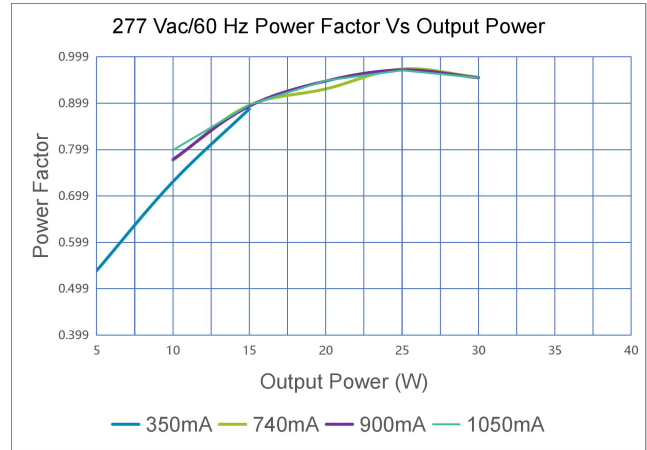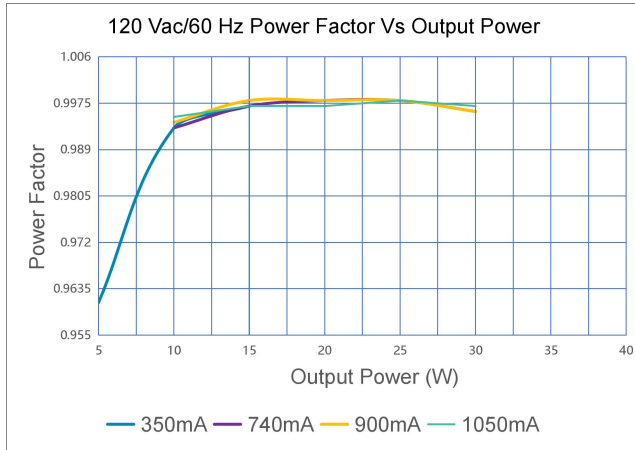

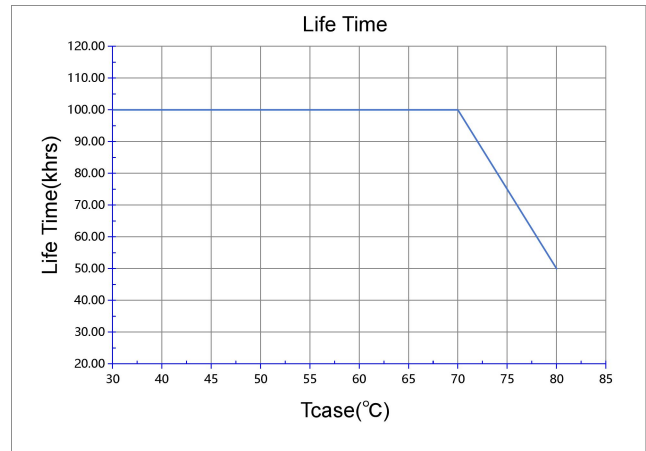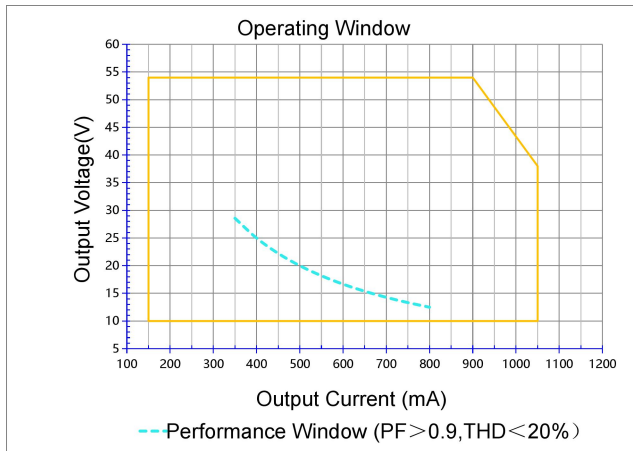

It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 54 W + 5%.

Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
54	350 mA	18.9
54	740 mA	40
44.4	900 mA	40
38	1050 mA	40