

Product features

- Built-in non isolated adjustable power LED driver
- Supports DALI-2, push DIM
- Color temperature adjustable
- Flicker-free LED driver
- Supports i-Data function (DALI part 251, 252, 253)
- Output current 200...800 mA by DIP switch adjust
- Max. output power 100 W
- DC emergency
- For luminaires with protection class I
- 5 years warranty



Product specifications

168262 ID ELNCB 100/230/200-800 DALI DIP CCT H21

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor	Dimension L x W x H (mm)
200 mA	220...240 Vac 220...240 Vdc	50...220 Vdc	94%	± 15mA	0.93	278.0 x 30.0 x 21.0
250 mA		50...220 Vdc	94%	± 5%	0.95	
300 mA		50...220 Vdc	94%			
350 mA		50...220 Vdc	94%			
400 mA		50...220 Vdc	94%			
450 mA		50...220 Vdc	94%			
500 mA		50...200 Vdc	94%			
550 mA		50...182 Vdc	94%			
600 mA		50...167 Vdc	93.5%			
650 mA		50...154 Vdc	93%			
700 mA		50...143 Vdc	93%			
750 mA		50...133 Vdc	93%			
800 mA		50...125 Vdc	92.5%			

Electrical specifications

Mains voltage supply

Rated input voltage range	220...240 Vac; performance range
Max. input voltage range	198...264 Vac; operational safety range
Rated frequency range	0/50/60 Hz
Performance/Operational safety	47...63 Hz
Max. input current	0.5 A @ 230 Vac & 0.5 A @ 230 Vdc

Battery operation

DC voltage range	220...240 Vdc; performance range
------------------	----------------------------------

Max. DC voltage range	198...280 Vdc; operational safety range
Protection against voltage peaks	
Withstand voltage	I/p-FG: 1.5 kVac, < 5 mA 60 sec; I/p-DA: 1.5 kVac, < 5 mA 60 sec; DA-FG: 1.5 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV, L/N-FG: 2 kV per IEC 61000-4-5
Control interface surge immunity	DA-DA 1 kV, DA-FG 2 kV per IEC 61000-4-5
Total harmonic distortion (THD)	
At rated input voltage range @ full load	≤ 10%
Output data	
Output current tolerance	200...250 mA ±15 mA at rated input voltage range
Output current tolerance	300...800 mA ±5% at rated input voltage range
No load output voltage	≤ 250 Vdc
Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage
DC emergency level	Current output decreased to 15% (programmable range: 1%...100%)
Protection functions output side	
Overvoltage protection	The output voltage is less than or equal to 250 Vdc
Overpower protection	The output power is less than or equal to 110 W
Short-circuit protection & Overvoltage protection	Short-circuit protection and overvoltage protection are designed to turn off the output and cannot be automatically restored. After removing the short circuit, the output can be restored by one of the following two operations: • After receiving DALI instruction off, turn on the light by dimming instruction. • Restart the driver: Power on the driver five seconds after the power failure.
Dimming operation and interface	
Dimming mode	DALI-2, push dimming
Dimming method	Amplitude dimming
Dimming current range	1%...100% (2...800 mA)
Standby power consumption	≤ 0.3 W
Connection terminals	
Connection terminal type	45° push in terminal
Wire cross section	Input wire: 0.5...1.5 mm ² ; output wire: 0.2...1.5 mm ²
Wire stripping length	8...9 mm
Degree of protection	
Protection rating	IP20
Operating data	
Output current range	Output current 200...800mA by DIP switch adjust
Default current	200 mA
Output voltage range	50...220 Vdc

Dimensions


Housing dimensions

Length (L)	278.0 mm
Width (W)	30.0 mm
Height (H)	21.0 mm


For all dimensions: values in mm; tolerances: ± 0.5 mm

Packaging details

Packing units	56 pcs
Carton size	375 x 325 x 185 mm
Carton weight	12.62 kg
Product weight	0.217 kg





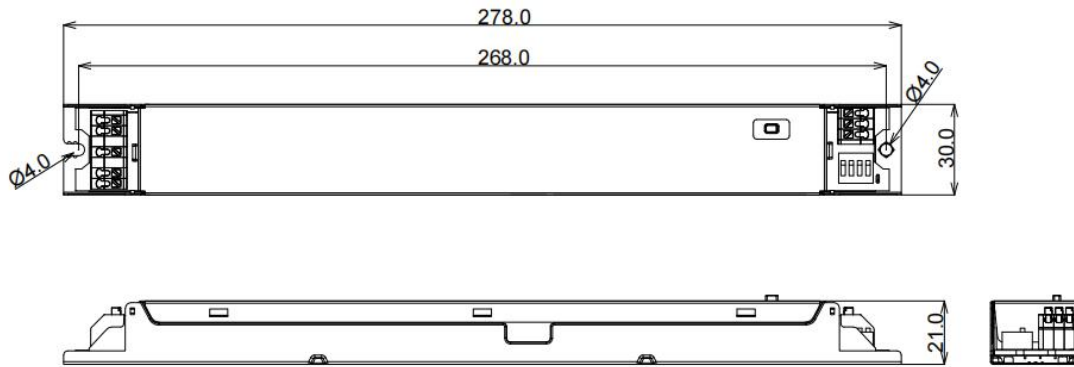


Wiring diagram

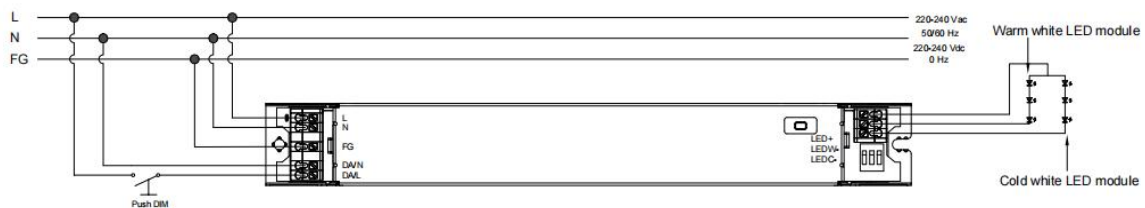

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5...10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.
- The outputs of drivers cannot be in paralleled.

Technical information

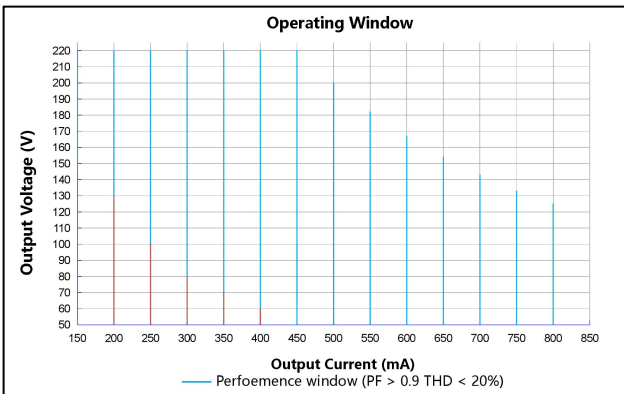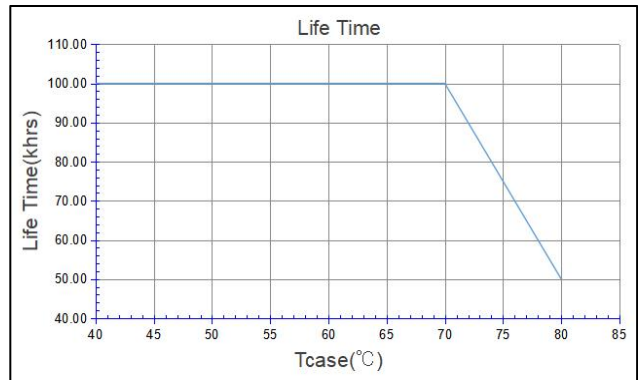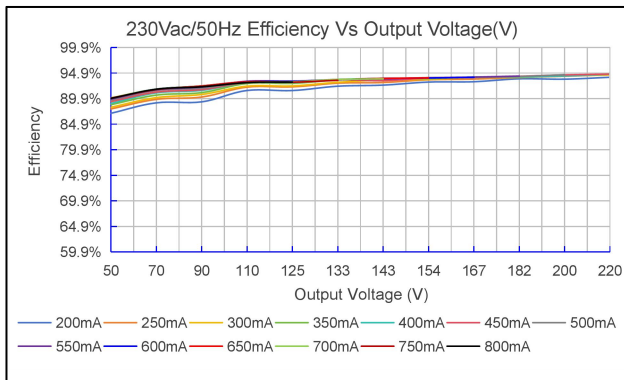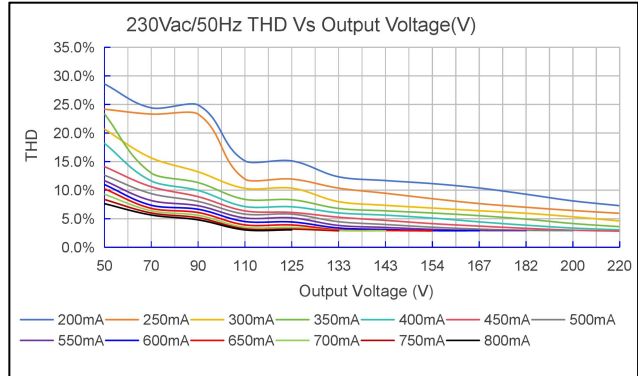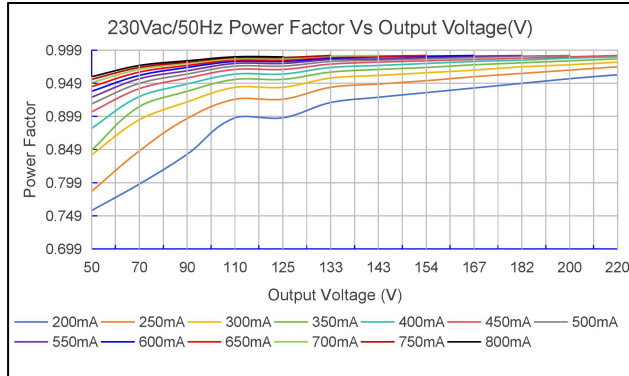

Adjustable output current with DIP switch

Vout	Pout	Iout	1	2	3	4
50...220 Vdc	44 W	200 mA	-	-	-	-
50...220 Vdc	55 W	250 mA	ON	-	-	-
50...220 Vdc	87 W	300 mA	-	ON	-	-
50...220 Vdc	66 W	350 mA	ON	ON	-	-
50...220 Vdc	77 W	400 mA	-	-	ON	-
50...220 Vdc	88 W	450 mA	ON	-	ON	-
50...200 Vdc	99 W	500 mA	-	ON	ON	-
50...182 Vdc	100 W	550 mA	ON	ON	ON	-
50...167 Vdc	100 W	600 mA	-	-	-	ON
50...154 Vdc	100 W	650 mA	ON	-	-	ON
50...143 Vdc	100 W	700 mA	-	ON	-	ON
50...133 Vdc	100 W	750mA	ON	ON	-	ON
50...125 Vdc	100 W	800 mA	-	-	ON	ON