

Product features

- Built-in non isolated adjustable power LED driver
- Supports DALI-2, push DIM
- Flicker-free LED driver
- Supports i-Data function (DALI part 251, 252, 253)
- Output current 200...900 mA by external DIP switch
- Max. output power 150 W
- DC emergency
- For luminaires with protection class I
- 5 years warranty



Product specifications

169399 ID ELNCB 150 230 200-900 DALI EDIP H21

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor	Dimension L x W x H (mm)
200...900 mA	220...240 Vac 220...240 Vdc	64...290 Vdc	95%	± 5%	0.95	302.0 x 30.0 x 21.0

Electrical specifications

Mains voltage supply

Rated input voltage range	220...240 Vac; performance range
Max. input voltage range	198...264 Vac; operational safety range
Rated frequency range	0/50/60 Hz
Performance/Operational safety	47...63 Hz
Max. input current	0.7 A @ 230 Vac & 0.7 A @ 230 Vdc

Battery operation

DC voltage range	220...240 Vdc; performance range
Max. DC voltage range	198...280 Vdc; operational safety range

Protection against voltage peaks

Withstand voltage	I/p-FG: 1.5 kVac, < 5 mA 60 sec; I/p-DA: 1.5 kVac, < 5 mA 60 sec; DA-FG: 1.5 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV, L/N-FG: 2 kV per IEC 61000-4-5
Control interface surge immunity	DA-DA 1 kV, DA-FG 2 kV per IEC 61000-4-5

Total harmonic distortion (THD)

At rated input voltage range @ full load	≤ 10%
--	-------

Output data

Output current tolerance	200...250 mA $\pm$ 15 mA at rated input voltage range
Output current tolerance	300...900 mA $\pm$ 5% at rated input voltage range
No load output voltage	$\leq$ 300 Vdc
Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	$\leq$ 1 at full load @ rated input voltage
Output SVM	$\leq$ 0.4 at full load @ rated input voltage
DC emergency level	Current output decreased to 15% (programmable range: 1%...100%)

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 300 Vdc
Overpower protection	The output power is less than or equal to 165 W
Short-circuit protection & Overvoltage protection	Short-circuit protection and overvoltage protection are designed to turn off the output and cannot be automatically restored. After removing the short circuit, the output can be restored by one of the following two operations: • After receiving DALI instruction off, turn on the light by dimming instruction. • Restart the driver: Power on the driver five seconds after the power failure.

Dimming operation and interface

Dimming mode	DALI-2, push dimming
Dimming method	Amplitude dimming
Dimming current range	1%...100% (2...900 mA)
Standby power consumption	$\leq$ 0.3 W

Connection terminals

Connection terminal type	45° push in terminal
Wire cross section	Input wire: 0.5...1.5 mm ² ; output wire: 0.2...1.5 mm ²
Wire stripping length	8...9 mm

Degree of protection

Protection rating	IP20
-------------------	------

Operating data






Output current range	Output current 200...900 mA by Connect external DIP switch adjust
Default current	200 mA
Output voltage range	64...290 Vdc
Noise level	< 20 dB, at full load @ 100 cm distance

Circuit breaker / Inrush current

MCB loading quantity	Inrush current Ipeak: 52.4 A	Inrush current Twidth: 255 μs			
	MCB type	B10	C10	B16	C16
	Units	7	11	12	18

Errors excepted. We reserve the right to make alterations in the interest of improving our products.

Technical information

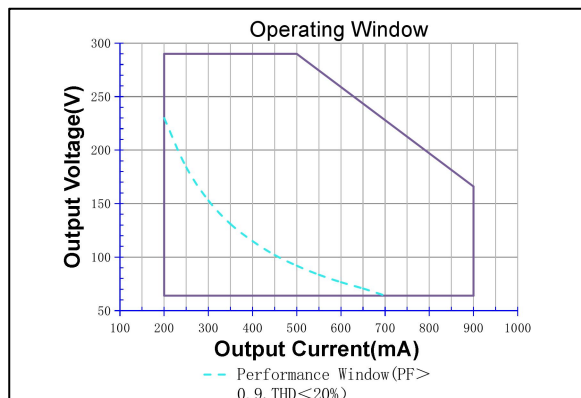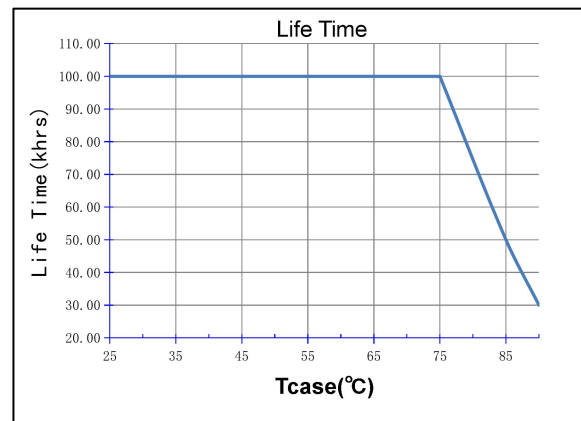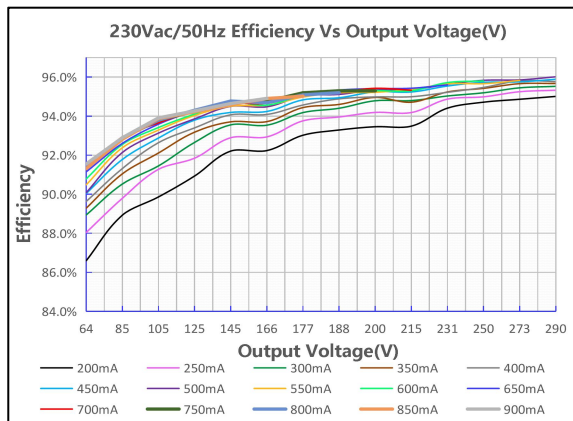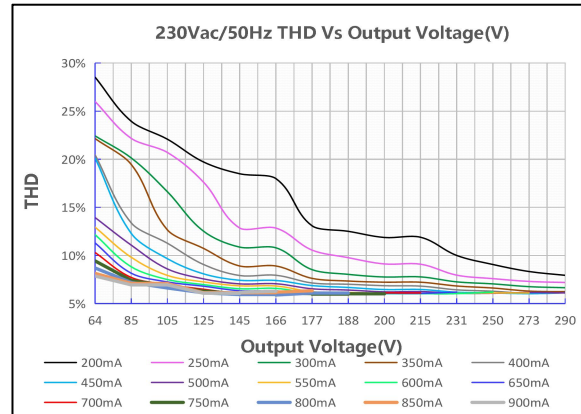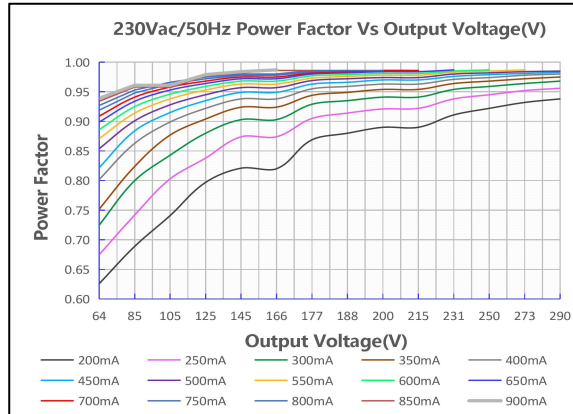

Connect external DIP switch (example)

Output current	External resistor	Output current	External resistor
200 mA	330 K Ω	550 mA	11 K Ω
225 mA	160 K Ω	575 mA	9.1 K Ω
250 mA	100 K Ω	600 mA	8.2 K Ω
275 mA	75 K Ω	625 mA	7.5 K Ω
300 mA	56 K Ω	650 mA	6.8 K Ω
325 mA	47 K Ω	675 mA	5.6 K Ω
350 mA	39 K Ω	700 mA	5.1 K Ω
375 mA	33 K Ω	725 mA	4.3 K Ω
400 mA	27 K Ω	750 mA	3.9 K Ω
425 mA	22 K Ω	775 mA	3.3 K Ω
450 mA	18 K Ω	800 mA	2.7 K Ω
475 mA	15 K Ω	825 mA	2.2 K Ω
500 mA	13.5 K Ω	850 mA	1.8 K Ω
525 mA	12 K Ω	875 mA	1.35 K Ω
550 mA	11 K Ω	900 mA	1 K Ω