

Product features

- Flicker-free LED driver
- Supports DALI-2, push DIM, push CCT control, D4i
- Usable as DT6 (2-channel) or DT8 (tunable white) driver
- Current adjustment via NFC
- Supports i-Data function (DALI part 251, 252, 253)
- Output current 50...400 mA
- Max. output power 40 W
- DC emergency
- Current output default value 100%
- For luminaires with protection class I
- Anti-glow



Product specifications

110571 ID ELNCB 40/230/050-400 DT8 D4i NFC

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor	Dimension L x W x H (mm)
50...400 mA	220...240 Vac 220...240 Vdc	50...240 Vdc	92%	± 5%	0.9 (Output Power > 15 W)	278.0 x 29.5 x 16.0

Electrical specifications

Mains voltage supply

Rated input voltage range	220...240 Vac; performance range
Max. input voltage range	198...264 Vac; operational safety range
Rated frequency range	0/50/60 Hz
Max. input current	0.24 A @ 230 Vac & 0.24 A @ 230 Vdc

Battery operation

DC voltage range	220...240 Vdc; performance range
Max. DC voltage range	176...280 Vdc; operational safety range

Protection against voltage peaks

Withstand voltage	I/p-FG: 1.5 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV, L-FG 2 kV, N-FG 2 kV

Total harmonic distortion (THD)

At rated input voltage range @ full load	≤ 10%
--	-------

Output data

Output current tolerance	± 5% at rated input voltage range
Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage
DC emergency level	DALI current output decreased to 15% (programmable)

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 250 V
Overpower protection	The output power is less than or equal to 44W
Short circuit protection	Short circuit protection is designed to turn off the output and cannot be automatically restored. After removing the short circuit, the output can be restored by one of the following two operations: - After receiving DALI instruction Off, turn on the light by dimming instruction. - Restart the driver: Power on the driver five seconds after the power failure.
No load output voltage	Open circuit protection is designed to turn off the output and cannot be automatically restored. After removing the open circuit, the output can be restored by one of the following two operations: - After receiving DALI instruction Off, turn on the light by dimming instruction. - Restart the driver: Power on the driver five seconds after the power failure.

Dimming operation and interface

Standby power consumption	≤ 0.3 W
Dimming mode	DALI-2, Push dimming
Dimming method	Amplitude dimming
Dimming current range	1%...100% (1.2...400 mA)

Integrated DALI bus power supply

Maximum allowed DALI bus supply current:	Max 250 mA (@ All D4i DALI bus current combine)
Typical output current	Max 55 mA
Output voltage	13.6...18.4 V

Connection terminals

Connection terminal type	Push in terminal
Wire cross section	Input wire: 0.5...1.5 mm ² ; Output wire: 0.2...1.5 mm ²
Wire stripping length	8...9 mm

Degree of protection

Protection rating	IP20
-------------------	------

Operating data

Output current range (DT8)	NFC control adjusts the current: 50...400 mA
Output current range (DT6)	NFC control adjusts the current: 25...400 mA per channel Max sum of output current: 600 mA

Dimensions

Housing dimensions

Length (L)	278.0 mm
Width (W)	29.5 mm
Height (H)	16.0 mm


For all dimensions: values in mm; tolerances: ± 0.5 mm

Packaging details

Packing units	TBD pcs
Carton size	TBD x TBD x TBD mm
Carton weight	TBD kg
Product weight	TBD kg



Wiring diagram

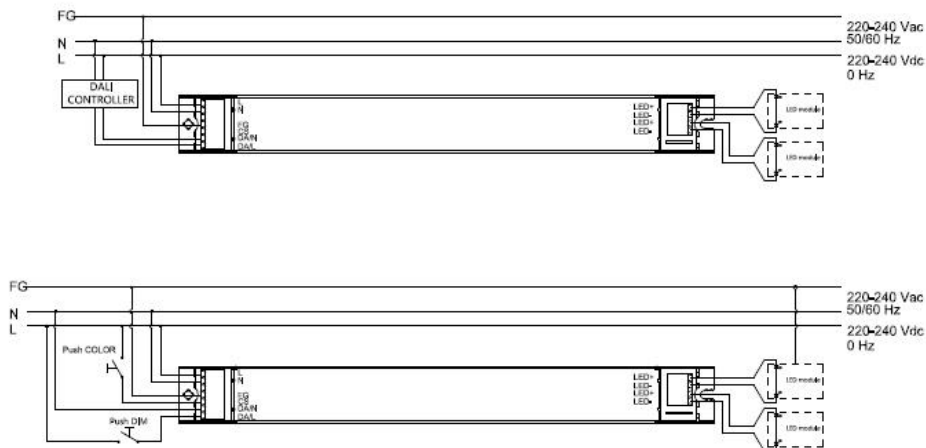

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5...10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuits.